

Captive pin shackles




N°	Part #	Ø mm	A mm	B mm	C mm	W.L. Kg	B.L. Kg	W.L.L. Kg	Weight Kg
CAPTIVE PIN «D» SHACKLES									
1	1401	4	13	8	5	320	1000	200	0.009
	1402	5	16	10	6	480	1500	300	0.016
	1403	6	20	12	7	680	2200	440	0.028
	1404	8	26	16	9	1000	3600	720	0.061
	1405	10	33	20	11	1520	5200	1040	0.114
	1406	12	39	24	13	2080	7000	1400	0.188

N°	Part #	Ø mm	A mm	B mm	C mm	W.L. Kg	B.L. Kg	W.L.L. Kg	Weight Kg
CAPTIVE LONG «D» SHACKLES									
2	1411	4	31	8	5	320	1000	200	0.012
	1412	5	39	10	6	480	1500	300	0.024
	1413	6	46	12	7	680	2200	440	0.040
	1414	8	62	16	9	1000	3600	720	0.092
	1415	10	78	20	11	1520	5200	1040	0.176

N°	Part #	Ø mm	A mm	B mm	C mm	W.L. Kg	B.L. Kg	W.L.L. Kg	Weight Kg
CAPTIVE TWISTED SHACKLES									
3	1422	5	37	10	6	480	1500	300	0.023
	1423	6	44	12	7	600	2100	440	0.039
	1424	8	59	16	9	1000	3700	740	0.090
	1425	10	74	20	11	1520	5200	1040	0.170

N°	Part #	Ø mm	A mm	B mm	C mm	W.L. Kg	B.L. Kg	W.L.L. Kg	Weight Kg
CAPTIVE PIN BOW SHACKLES									
4	1441	4	18	8	5	320	1000	200	0.010
	1442	5	23	10	6	480	1500	300	0.019
	1443	6	27	12	7	600	2200	440	0.033
	1444	8	37	16	9	1000	3700	740	0.075
	1445	10	46	20	11	1520	5200	1040	0.139

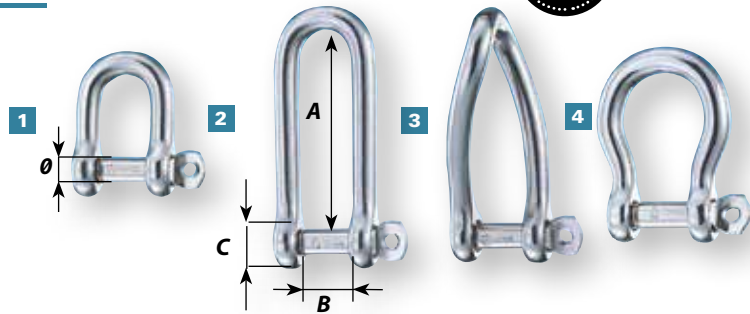

Working Load (WL): for nautical applications.



Working Load Limit (WLL): for industrial applications only. The safety factor is 5 times the breaking load. WLL = Breaking load / 5

+ BENEFITS

- Self-locking pin cannot be dropped when opened
- No risk of losing the pin
- Wide range to meet all needs
- Forged in 316L stainless steel
- Designed and made in France

Key pin shackles



+ BENEFITS

- Patented design
- Opening by half turn
- Easy to install with one hand
- Forged in 316L stainless steel
- Designed and made in France

N°	Part #	Ø mm	A mm	B mm	D mm	W.L. Kg	B.L. Kg	Weight Kg
KEY PIN SHACKLES								
5	1432	5	37	13		400	1000	0.031
	1433	6	45	16		520	1500	0.048
	1434	8	59	21		800	2300	0.121

N°	Part #	Ø mm	A mm	B mm	D mm	W.L. Kg	B.L. Kg	Weight Kg
KEY PIN SHACKLES WITH BAR								
6	81432	5	37	13	12	400	1200	0.031
	81433	6	45	16	15	520	1700	0.052
	81434	8	59	21	20	800	2500	0.123

Thimble shackles



+ BENEFITS

- Forged in 316L stainless steel
- Allows splicing on head of shackle
- No additional stainless steel cringles
- Designed and made in France

N°	Part #	Ø mm	A mm	B mm	Ø rope max. mm	W.L. Kg	B.L. Kg	Weight Kg
CAPTIVE PIN								
7	1494	8	41	16	12	1000	3000	0.078
	1495	10	51	20	16	1520	5000	0.146

N°	Part #	Ø mm	A mm	B mm	Ø rope max. mm	W.L. Kg	B.L. Kg	Weight Kg
ALLEN HEAD PIN								
8	1394	8	41	16	12	1000	3000	0.076
	1395	10	51	20	16	1520	5000	0.142

WL: working load - BL: breaking load